










i-Connect Installation Kit

JUNCTION BOX FOR SUPRA SERIES SMX LIGHTS

| PART DESCRIPTION | SUPRA I-CONNECT INSTALLATION KIT |
|--|--|
| Part Number | 60-0402 |
| For Use With | SMX54 Underwater Lights |
| Max Number of Lights Per Hub | 4 |
| Max Number of Hubs Per Installation | Up to 4 (SMX) |
| Ingress Protection Rating | IP68 |
| Features | Full control via certified MFD or EOS-LUX-SUPRA Display Specially Designed for Ease of Installation Plug and Play Connections IP68 Field Installable Connecters (supplied) Built in Switching Power Relay Replaceable Blade Fuse For Each Light Status Indication LED for Each Light Built In Noise Filter |
| Warranty | 3 Years |
| User Control Options * Requires SUPRA Bridge Module | SUPRA i-Connect Hub Switch (included) Certified MFD Screen* EOS-LUX-SUPRA Display WiFi control from Smart phone or Connected Device (via MFD or local WiFi Network)* |

^{*} Requires SUPRA Bridge Module

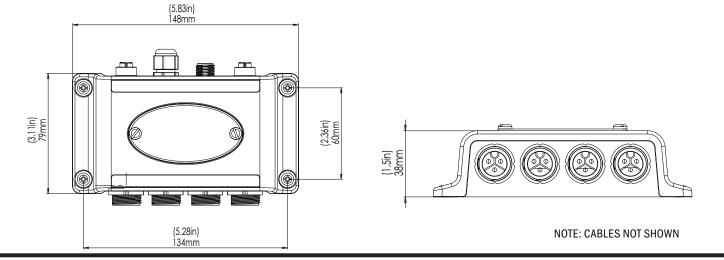

EMEAA: Info@Lumishore.com | USA: Sales@LumishoreUSA.com Units 11 & 12, Ashmount Business Park, Upper Fforest Way, Swansea, SA6 8QR | 7137 24th Court East, Sarasota, FL 34243, USA



SUPRA Series - SMX

i-Connect Hub

JUNCTION BOX FOR SUPRA SERIES SMX LIGHTS





| TECHNICAL | | |
|--|---|--|
| Number of Lights per Hub | 4 | |
| Max Number of Hubs per Installation (Surface Mount) | 4 Hubs (16 Lights) | |
| Connections | SMX - Field Installable Connector (supplied with Hub) | |
| Fuses | Replaceable Blade Fuses. Each Light Individually Fused | |
| Status Indication LEDs | Yes – for Each Light | |
| Voltage Range | 10 .5 - 31V DC | |
| Max Input Current | 40 A | |
| Max Output Current (i.e. Max Current Per Light) | 10 A | |
| Cable Entry / Exit | IP68 Connections | |
| Switching Method | Built-in Relay | |
| Noise Suppression | Built-in Noise Filter | |
| Reverse Polarity Protection | Yes | |
| Lumi-Link Compatible | Yes | |

| PHYSICAL | | |
|--|---|--|
| Ingress Protection | IP 68 | |
| Size - Not Including Cable Glands (LxWxH) | 148 mm x 79 mm x 38 mm (5.83" x 3.11" x 1.50") | |
| Box Construction | Robust Weatherproof ABS | |

| SUPRA I-CONNECT HUB & SWITCH FUNCTIONALITY | | |
|---|--|--|
| Mode | Toggle switch to move to the next mode | |
| White | Yes | |
| Blue | Yes | |
| Strobe | Yes | |
| Synchronized Strobe | Yes | |
| Fade Mode | Yes | |
| Synchronized Fade Mode | Yes | |
| Light Control via MFD Screen or EOS-LUX- SUPRA Display | Yes* | |

^{*}These features require a SUPRA Bridge Module and compatible MFD. This allows easy integration and control direct from MFDs, and other third party control systems.

| I-CONNECT HUB ACCESSORIES | PART NUMBER |
|---------------------------|-------------|
| Additional i-Connect Hub | 60-0317 |
| 3m Light Extension Cable | 60-0401 |
| SUPRA Bridge Module | 60-0368 |
| DMX Link Cable - 0.2m | 60-0465 |
| DMX Extension Cable - 1m | 60-0403 |
| DMX Extension Cable - 5m | 60-0404 |
| DMX Extension Cable - 15m | 60-0405 |

SUPRA-SMX-I-CONNECT-HUB.11.23