


## Cut and Seal LUX Superbright Strip Light SL180 (IP68)


PART DESCRIPTION		CUT AND SEAL - LUX SUPERBRIGHT STRIP LIGHT - 180 LED PER METER - IP68	
Part Number	60-0466-1000 - LUX Strip Light SL180 (IP68) CRGBW - 1000mm (Cut and Seal) 60-0466-2500 - LUX Strip Light SL180 (IP68) CRGBW - 2500mm (Cut and Seal) 60-0466-5000 - LUX Strip Light SL180 (IP68) CRGBW - 5000mm (Cut and Seal)		
Available colors	Full Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) in the same LED strip		
LED type	Warm White, Cold White, Red, Green and Blue (5 Channel)		
LED Density	180 LEDs per meter		
Warranty	3 Years		
Compatible Drivers	LUX Strip Light Driver (see accessories)		
Customer Control Options	EOS-LUX Command Center Customer Supplied Momentary Switch		
Installation	Cut to length, and seal the cut end before installation Plug and Play		



SUGGESTED MOUNTING BRACKET SPACING

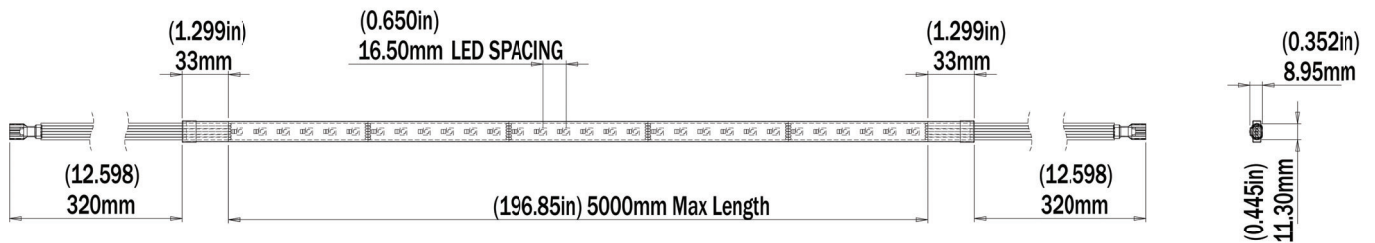

CUT LOCATIONS

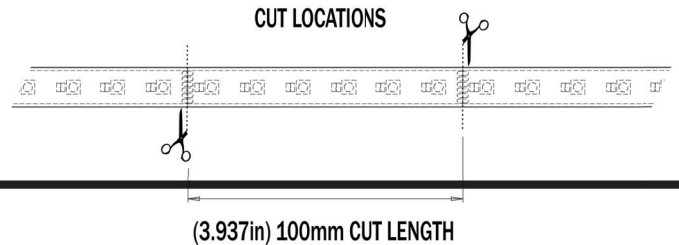

EMEA: [Info@Lumishore.com](mailto:Info@Lumishore.com) | USA: [Sales@LumishoreUSA.com](mailto:Sales@LumishoreUSA.com)

Units 11 & 12, Ashmount Business Park, Upper Fforest Way, Swansea, SA6 8QR | 7137 24th Court East, Sarasota, FL 34243, USA



### Cut and Seal LUX Superbright Strip Light SL180 (IP68)

#### TECHNICAL

Compatible Drivers	LUX Strip Light Driver (see accessories)
Number of LED strips per Driver	Multiple - up to 10m (32.8') total

#### PHYSICAL

Ingress Protection	IP68
Cross Section	14.5mm x 5mm (0.57" x 0.2")
Lengths Available	1m, 2.5m and 5m (3.3ft, 8.2ft and 16.4ft) (not including cables)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before install Cut in 100mm steps Adhesive Backing and Screw Clips
Weight - g/m (oz/ft)	95 g/m (1 oz/ft)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas/ Indoor For above water applications only

#### ACCESSORIES

Accessory	Part number
EOS-LUX Command Center	60-0366
LUX Strip Light Driver - Voltage Stabilised (10.5 - 31V DC)	60-0383
LUX Strip Light Driver - Non-Stabilised (23-25 V DC)	60-0384
Strip light extension cable - 1m	60-0385
Strip light extension cable - 2m	60-0386
Strip light extension cable - 3m	60-0387
Strip light extension cable - 4m	60-0388
Strip light extension cable - 5m	60-0389
6-core cable splitter - 2 way	60-0438
6-core cable splitter - 3 way	60-0439
Stainless Steel Clips (Bag of 25)	60-0409