

LUX SL90 & SL180 IP68 Strip Light Installation Guide Full spectrum color tunable lighting, including cold and warm white light

Please read the following pages before attempting installation to ensure complete understanding of the LUMISHORE Strip Lights



Before you start...

- Always ensure that the vessel's power source and battery are disconnected or isolated prior to installation.
- A qualified professional should carry out both the electrical and mechanical installation.
- The Lux Strip Light Is designed to be used in conjunction with the Lumishore Lux Strip Light Driver modules (see diagram below). Do not connect to any other 3rd party lighting control products or drivers.
- The lux Strip Light is fully sealed and can be installed inside or outside, it can be installed in wet areas but is not designed to be permanently submerged in water.
- Choose a location the Strip Light is made from UV resistant material but should not be installed in areas of strong direct sunlight.
- The Strip Light has a bend radius of 50mm in the vertical axis, do not bend in the horizontal axis or twist the Strip Light.
- The Strip Light is delivered in premade lengths that are factory sealed to meet IP68 standards *DO NOT CUT STRIP LIGHT*.



Handling & Manipulating:




DO NOT allow the strip light to drop or twist during install - uncoil it carefully from the reel **DO NOT** apply pressure to the strip in the area of the LEDs - press the edge of the strip only **DO NOT** pull, stretch, twist or bend the strip in the horizontal axis

ALWAYS use 2 people to install lengths of over 1m. One person to install, one person to hold and uncoil the strip

ALWAYS lay the strip out flat in a straight line - don't allow the strip to bend, kink, or coil in a heap

Installation Diagram:

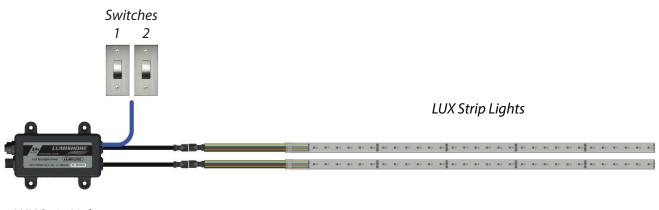

LUX Strip Light Driver

NOTE : The Lumishore Lux Strip Lights requires connection to the Lumishore LUX Strip Light Driver Module. For full electrical installation and wiring diagrams please refer to the LUX Strip Light Driver Installation Manual (45-0143).

Power Rating = 5 watts Per Meter

Voltage Input Range = 23 - 25V*

***ONLY USE WITH LUMISHORE STRIP LIGHT DRIVER MODULES**


Lumishore UK Unit D12, Upper Fforest Way, Swansea Enterprise Park, Swansea, SA6 8QR | +44(0)1792 398500 | Info@Lumishore.com Lumishore USA 7137 24TH Court East Sarasota, Florida 34243 | (941) 405-3302 | Sales@LumishoreUSA.com www



Mechanical Installation - 3M Adhesive Strip


Thoroughly clean the mounting surface using IPA, ensure it is dust and dirt free.

Peel back the 3M adhesive backing layer and firmly press strip light in place. Press the edges ONLY. do not apply pressure to the LEDs. Allow the adhesive to set for 24 hours before switching the strip light on.



Outdoor Installation - Mounting Fasteners

For outdoor installation, wet areas or tight bend radii: it is recommended that mechanical fasteners are used in addition to the adhesive layer.



Using suitable screws the fasteners should be placed every 25 - 30cm apart and/or at either side of the bend



Mounting Clips (Optional)

For narrow mounting channels Lumishore can supply Stainless Steel metal clips. These are attached using a countersink screw. Gently prize open the metal clip and insert the strip light. Once in place gently squeeze the clip together over the strip light.





Warranty

LUMISHORE Ltd warrants its lighting systems and associated lights and accessories to be free from defects in workmanship for a period of three years, starting from the date of original purchase. Should your lighting system have a problem during this period, please contact your dealer, boat manufacturer or broker as soon as you become aware of the defect.

Misuse, abuse, improper installation, neglect, improper shipping, damage caused by disasters (e.g. fire, flood, storm and lightning), installation by unqualified personnel, unauthorized repair or modification or non-approved installations will void this warranty. For the avoidance of confusion and doubt, non compliance with all installation guidelines, maintenance and operating instructions in this document constitute non conformance with warranty terms.

Full warranty details including exclusions are available at www.Lumishore.com.

The LUX Strip Light is designed to work with Lumishore LUX Strip Light Driver Module ONLY, do not use with other 3rd party drivers, this will invalidate the warranty.

