






## LUX Superbright NEON FLEX Strip Light



PART DESCRIPTION	LUX SUPERBRIGHT NEON FLEX STRIP LIGHT - 180 LED PER METER - IP67
Part Number	60-0382
Available colors	Full Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) in the same LED NEON FLEX strip light
LED type	Warm White, Cold White, Red, Green and Blue (5 Channel)
LED Density	180 LEDs per meter
Warranty	3 Years
Compatible Drivers	LUX Strip Light Driver (see accessories)
Customer Control Options	EOS-LUX Command Center Customer Supplied Momentary Switch
Electrical Installation	Plug and Play

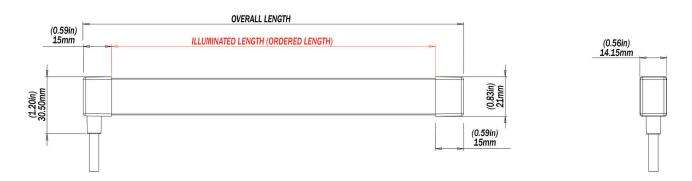

EMEAA: Info@Lumishore.com | USA: Sales@LumishoreUSA.com Units 11 & 12, Ashmount Business Park, Upper Fforest Way, Swansea, SA6 8QR | 7137 24th Court East, Sarasota, FL 34243, USA







## **LUX Superbright NEON FLEX Strip Light**

TECHNICAL		
Compatible Drivers	LUX Strip Light Driver (see accessories)	
Number of LED strips per Driver	Multiple - up to 10m (32.8') total	
PHYSICAL		
Ingress Protection	IP67	
Cross Section	14.5mm x 21mm (0.56" x 0.83")	
Lengths Available	0.1m to 3m in increments of 0.1m (not including cables) 3.94" to 9.84' in increments of 3.94"  Note: This is the Illuminated length. Allow 15mm (0.59") at each end for the end caps - see drawing for further info.	
Construction	Fully Encapsulated and Potted with Spot Free Diffuser	
Mechanical Installation	Stainless Steel Screw Clips	

140 g/m (1.5 oz/ft)

Outdoor / Partially Covered Areas / Indoor

For above water applications only

ACCESSORIES		
Accessory	Part number	
EOS-LUX Command Center	60-0366	
LUX Strip Light Driver - Voltage Stablised (10.5 - 31V DC)	60-0383	
LUX Strip Light Driver - Non-Stabilised (23-25 V DC)	60-0384	
Strip light extension cable - 1m	60-0385	
Strip light extension cable - 2m	60-0386	
Strip light extension cable - 3m	60-0387	
Strip light extension cable - 4m	60-0388	
Strip light extension cable - 5m	60-0389	
6-core cable splitter - 2 way	60-0438	
6-core cable splitter - 3 way	60-0439	

Weight - g/m (oz/ft)

**Installation Location** 

UV Resistant
Salt Spray Tested