




eclipse

ECLIPSE Courtesy Light - RGB

CL30



PART DESCRIPTION	CL30 ECLIPSE COURTESY LIGHT
Part Number	60-0572 - ECLIPSE Courtesy Light CL30 RGB
Available Colors	RGB
LED Type	2 x 0.5W Red LEDs / 2 x 0.5W Blue LEDs / 2 x 0.5W Green LEDs
Fixture Lumens	45
Warranty	3 Years
Customer Control Options	ECLIPSE Command Center
Electrical Installation	Simple 2 Wire Installation

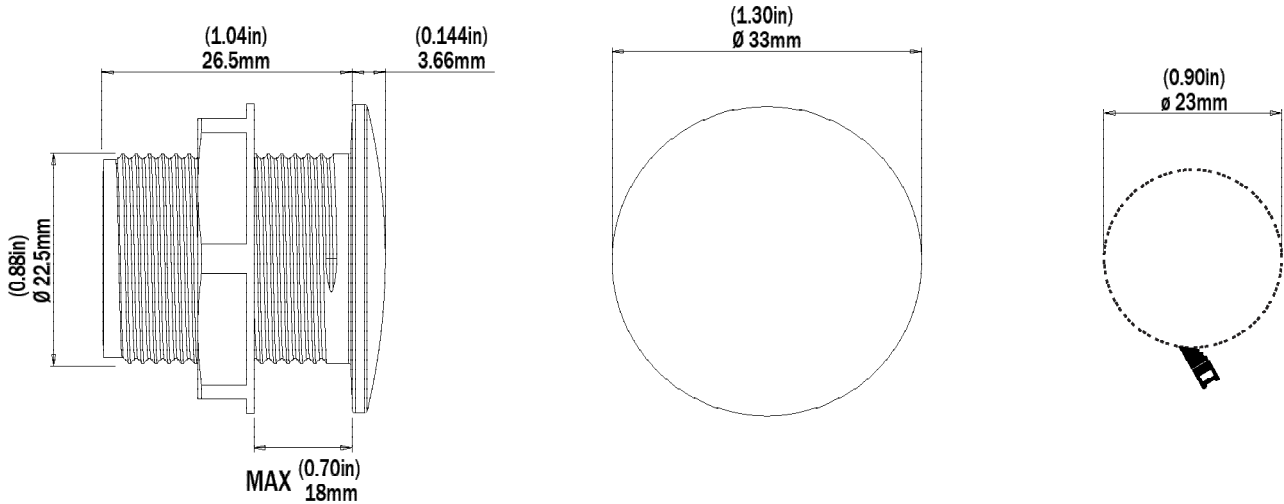

TECHNICAL

Driver	Internal Driver
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw (12/24V DC)	0.1A
Surge Protection	Yes
Low Voltage Protection	Yes
Auto Power Control	Yes
“Soft Start” Electronics Protection	Yes
Reverse Polarity Protection	Yes
In Rush Current Protection	Yes
Power Line Noise Suppression	Yes
ISO 8846 (Ignition Protection)	Yes

PHYSICAL

Ingress Protection	IP68
Front Diameter (Bezel)	33mm (1.3")
Profile	3.66mm (1.44")
Depth	30.0mm (1.180")
Hole Diameter for Fitting	23.0mm (1.00")
Construction	Clear PC Body
Mechanical Installation	Bulkhead Panel Mount (with marine adhesive)
Weight	34g (1.2 oz)
Installation Location	Outdoor / Partially Covered Areas / Indoor

ACCESSORIES

ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)

From Smart Device/MFD:

On/Off Control	Yes
RGB Colour Wheel & Cycle Modes	Yes
Custom Lighting Scenes	Yes
Zone Control	Yes
Strobe	Yes
Sound to Light	Yes

From Momentary Switch (Optional):

On/Off Control	Yes
RGB Color Selection & Cycle Modes	Yes
Strobe	Yes
Zone or Scene Selection	Yes
Dimming Control	Yes