




SY WELD-IN UNDERWATER LED LIGHT POWER SUPPLY

**Subject to commissioning review*

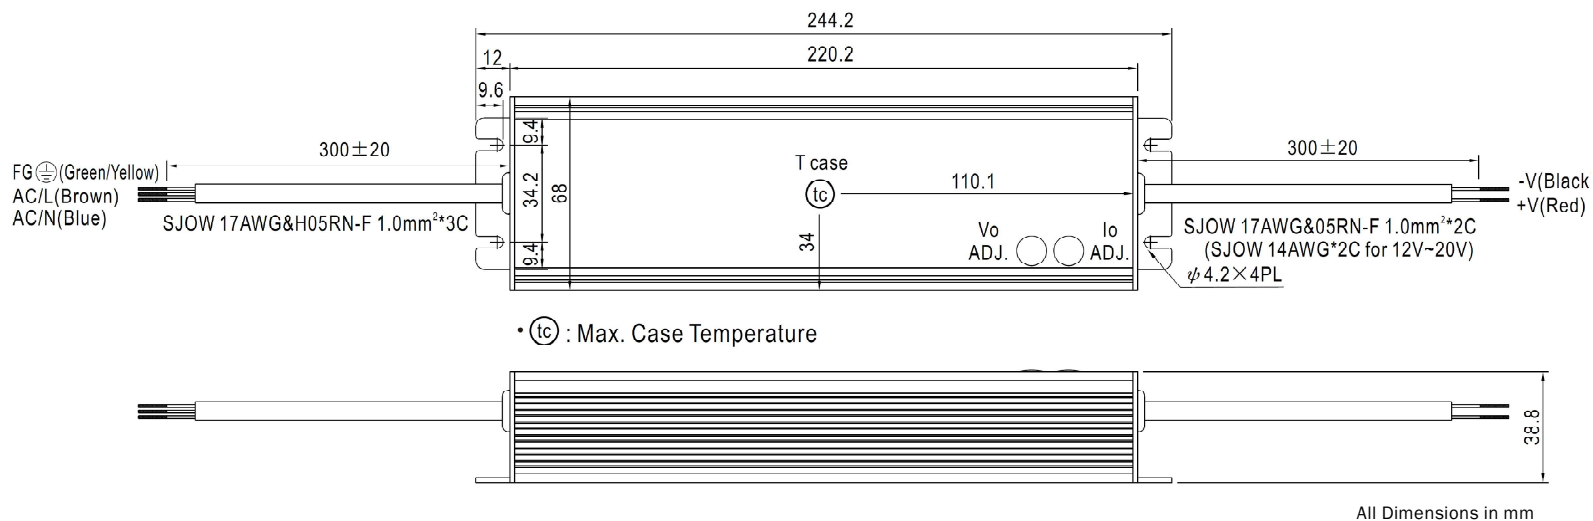

**SY Series**

AC/DC Power Supply

SY WELD-IN UNDERWATER LED POWER SUPPLY

TECHNICAL

PSU Type	AC / DC Converter
Supply Voltage Range	90-240V AC
Frequency Range	47 - 63 Hz
Max Current Draw (AC)	4.0 A
Heat Dissipation	18W
Surge Protection	Yes (3,000V)
Number of Drivers per PSU	1

PHYSICAL

Ingress Protection	IP 65
Weight	1.3 Kg
Size - not including connectors (LxWxH)	244mm x 68mm x 39mm (9.6" x 2.7" x 1.5")

FOR USE WITH:

TRX802 EOS DC Driver	28-0074
SY220 EOS DC Driver	28-0073
SY250 EOS DC Driver	28-0067
SY300/310 EOS DC Driver	28-0071

DATA IS SUBJECT TO CHANGE WITHOUT NOTICE

LUMISHORE DATASHEET

SY-AC-DC-PSU-240-0120

Edward.Lacey@lumishore.com

Tel : +44 (0) 208 123 2959

Unit 2, Technium 1, Kings Road, Swansea, SA1 8PH, UK | 7137 24th Court East, Sarasota, FL 34243, USA

LUMISHORE.COM