



LUX Strip Light - SL90 (IP22)

| PART DESCRIPTION | | LUX STRIP LIGHT - 90 LED PER METER - IP22 |
|--------------------------|--|---|
| Part Number | 60-0380 | |
| Available colors | Full Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) in the same LED strip | |
| LED type | Warm White, Cold White, Red, Green and Blue (5 Channel) | |
| LED Density | 90 LEDs per meter | |
| Warranty | 2 years | |
| Compatible Drivers | Lux Strip Light Driver (see accessories) | |
| Customer Control Options | Lumi-Link Command Center Customer Supplied Momentary Switch | |
| Electrical Installation | Plug and Play | |

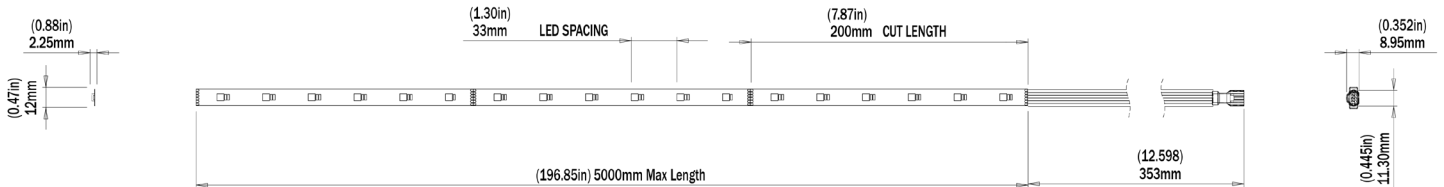

SUGGESTED MOUNTING BRACKET SPACING





LUX Strip Light - SL90 (IP22)

TECHNICAL

| | |
|---------------------------------|--|
| Compatible Drivers | Lux Strip Light Driver (see accessories) |
| Number of LED strips per Driver | Multiple - up to 10m (32.8') total |

PHYSICAL

| | |
|-------------------------|--|
| Ingress Protection | IP22 |
| Cross Section | 12mm x 2.25mm (0.47" x 0.09") |
| Lengths Available | 0.2m to 5m in increments of 0.2m (not including cables) 7.87" to 16.4' in increments of 7.87" |
| Mechanical Installation | Adhesive Backing and Screw Clips |
| Weight - g/m (oz/ft) | 23 g/m (0.25 oz/ft) |
| UV Resistant | Yes |
| Salt Spray Tested | Yes |
| Installation Location | Indoor only |

ACCESSORIES

| Accessory | Part number |
|---|-------------|
| Lumi-Link Command Center | 60-0366 |
| Lux Strip Light Driver - Voltage Stabilised (10.5 - 31V DC) | 60-0383 |
| Lux Strip Light Driver - Non-Stabilised (23-25 V DC) | 60-0384 |
| Strip light extension cable - 1m | 60-0385 |
| Strip light extension cable - 2m | 60-0386 |
| Strip light extension cable - 3m | 60-0387 |
| Strip light extension cable - 4m | 60-0388 |
| Strip light extension cable - 5m | 60-0389 |
| 6-core cable splitter - 2 way | 60-0438 |
| 6-core cable splitter - 3 way | 60-0439 |